


Hydraulic Toe Jack

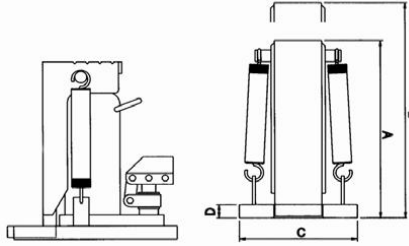

Capacity: 5-30 tonnes

- ◆ Lifts from head or toe
- ◆ Maximum pressure: 700 bar
- ◆ Stroke 120-160mm
- ◆ For use in very confined work areas

Product Code	Cylinder Capacity t		Stroke (mm)	Retracted	Extended	Base	Base	Weight (kgs)
	(Head)	(Toe)		A	B	C	D	
HHQD-5	5	2.5	120	243	363	170x230	19	11
HHQD-10	10	5	150	290	440	190x260	22	19
HHQD-20	20	10	160	327	487	250x280	28	33
HHQD-30	30	15	160	347	507	280x310	32	50

Hydraulic Swivel Toe Jack



Capacity: 5 , 10 or 25 tonnes

- ◆ Lifts from head or toe
- ◆ Toe swivels for easy alignment
- ◆ For use in very confined work areas

Product Code	Capacity (t)	Lifting Range of Foot (mm)	Lifting Range of Head (mm)	Weight (kgs)
HM50	5	25-230	368-573	25
HM100	10	30-260	420-650	35
HM250	25	58-273	505-720	100

Hydraulic Bottle Jack



Capacity: 2-50 tonnes

- ◆ Adjustable screw ram cap
- ◆ Overload pressure valve

Product Code	Capacity	Min Height	Lift.Height	Adj.Height	Base PLate	Weight (kgs)
	(tonne)	(mm)	(mm)	(mm)	LxW(mm)	
ABJ2	2	181	116	48	88x92	2.7
ABJ3	3	194	118	60	92x100	3.3
ABJ5	5	216	127	70	96x100	4.5
ABJ10	10	230	150	80	110x123	6.6
ABJ15	15	230	150	80	133x136	8.6
ABJ20	20	242	150	60	144x150	11
ABJ30	30	260	155	60	T.b.c.	17.5
ABJ50	50	270	160	60	T.b.c	27.6