


Technical data model VSIII


| Model | EAN-No. 4025092* | Capacity in kg/ number of chain falls | Chain dimensions d x p mm | Lift per 1 m hand chain overhaul mm | Handle pull at WLL daN | Weight at standard lift (3 m) kg |
|--------------|---------------------|------------------------------------------------|------------------------------------|----------------------------------------------|------------------------------|-------------------------------------------|
| VSIII 0,25/1 | *665322 | 250/1 | 4x12 | 50 | 20 | 3.9 |
| VSIII 0,5/1 | *949545 | 500/1 | 5x15 | 26 | 21 | 9.0 |
| VSIII 1,0/1 | *949927 | 1000/1 | 6x18 | 24 | 24 | 11.5 |
| VSIII 1,5/1 | *593854 | 1500/1 | 8x24 | 17 | 30 | 17.5 |
| VSIII 2,0/1 | *949934 | 2000/1 | 8x24 | 19 | 32 | 19.0 |
| VSIII 2,0/2 | *949941 | 2000/2 | 6x18 | 15 | 29 | 17.3 |
| VSIII 3,0/1 | *949958 | 3000/1 | 10x30 | 12 | 40 | 31.0 |
| VSIII 3,0/2 | *949965 | 3000/2 | 8x24 | 10 | 37 | 27.0 |
| VSIII 5,0/2 | *949972 | 5000/2 | 10x30 | 8 | 41 | 43.0 |

Dimensions model VSIII

| Model | VSIII 0,25/1 | VSIII 0,5/1 | VSIII 1,0/1 | VSIII 1,5/1 | VSIII 2,0/1 | VSIII 2,0/2 | VSIII 3,0/1 | VSIII 3,0/2 | VSIII 5,0/2 |
|------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| A min., mm | 290 | 350 | 380 | 450 | 460 | 490 | 570 | 580 | 700 |
| B, mm | 12 | 21 | 27 | 33 | 37 | 37 | 46 | 46 | 56 |
| C, mm | 26 | 28 | 32 | 37 | 41 | 41 | 44 | 44 | 50 |
| D, mm | 11 | 16 | 19 | 22 | 27 | 27 | 31 | 31 | 37 |
| E, mm | 118 | 145 | 158 | 180 | 205 | 170 | 240 | 220 | 250 |
| F, mm | 113 | 140 | 155 | 175 | 180 | 155 | 210 | 175 | 190 |
| G, mm | 65 | 80 | 87 | 85 | 94 | 87 | 110 | 94 | 95 |
| H, mm | 48 | 60 | 68 | 90 | 86 | 68 | 100 | 81 | 95 |
| K, mm | 190 | 240 | 270 | 300 | 320 | 285 | 370 | 340 | 410 |

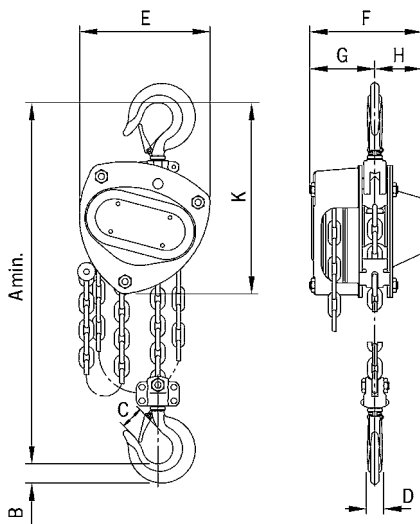

Model VSIII, 250 - 3000 kg, single fall

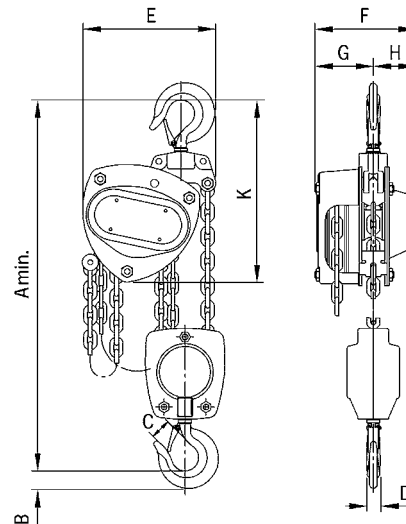

Model VSIII, 2000 - 5000 kg, double fall



Option: Chain container

INFO

Yale hoists and trolleys are not designed for passenger elevation applications and must not be used for this purpose.