





LiftinGear

Premier Lifting & Handling Products

Electric Vehicle Winch 12vDC 2500LBS (1136kgs)

DW2500

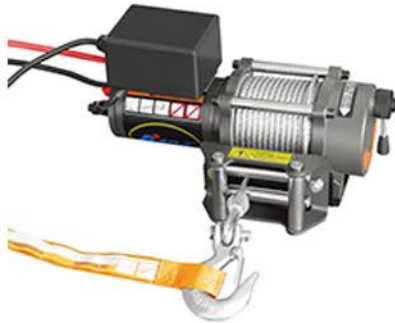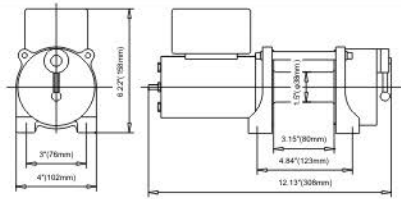

Rated line pull	2500lbs(1136kgs)						
Motor data	12V DC 0.9KW/1.2HP 24V DC 1.0KW/1.36HP						
Gear reduction ratio	253:1						
Cable(Dia. × L)	Φ0.2" × 46'(Φ5.1mm × 14m)						
Drum size(Dia. × L)	Φ1.5" × 3.15"(Φ38mm × 80mm)						
Mounting bolt pattern	4.84" × 3"(123mm × 76mm) 4-M8						
Line Pull And Rope Capacity Inlayer			Pull,Speed,Amperes,Volts(First layer)				
Layer	Rated Line Pull (Lbs /kgs)	Total Rope On Drum ft(m)	Line Pull lbs(kgs)	Line speed Ft/min(m/min)		Current A	
1	2500(1136)	6.56(2)	0	12V DC	24V DC	12V DC	24V DC
2	2021(918)	14.76(4.5)	0	9(2.74)	10(3.05)	13	6.5
3	1696(771)	24.6(7.5)	500(227)	7.5(2.28)	8.2(2.5)	40	20
4	1462(664)	36(11)	1000(454)	5.9(1.8)	6.5(1.98)	68	35
5	1284(583)	46(14)	2000(909)	2(0.6)	2.2(0.67)	95	52
-	-	-	2500(1136)	1(0.3)	1.2(0.36)	150	82



SafetyLiftinGear.com

Fall Protection • Lifting Equipment

