


Stainless Steel High Tensile Lifting Shackles

dee with type A screw collar pin

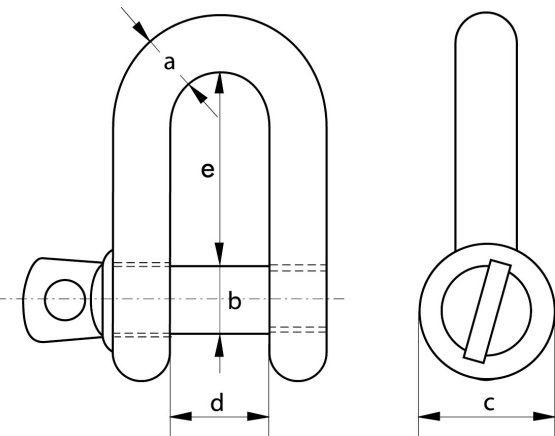

Material 17/4 PH precipitation hardening martensitic stainless steel

Safety Factor MBL equals 6 x WLL

Finish Polished

Certification As standard; EC Declaration of Conformity
Upon request; certificate of basic raw material

WLL	Diameter Bow	Diameter Pin	Diameter Eye	Width Inside	Length Inside	Product Code	Weight Each
t	a	b	c	d	e		kg
	mm	mm	mm	mm	mm		
1	8.0	10.0	20	16	32	91001	0.10
2	10.0	12.7	25	20	40	91002	0.20
3	12.7	16.0	32	25	50	91003	0.40
5	16.0	19.0	38	32	64	91004	0.70
7	19.0	22.2	45	38	76	91005	0.90
9	22.2	25.4	50	44	88	91006	1.40
11	25.4	28.6	56	51	102	91007	2.20
13	28.6	31.8	64	57	114	91008	2.90
15	31.8	34.9	70	64	128	91009	4.10
18	34.9	38.0	76	70	140	91010	6.20

* The above product is available with extra long screw pin (with hole for split pin) and with countersunk pin with slotted head.