




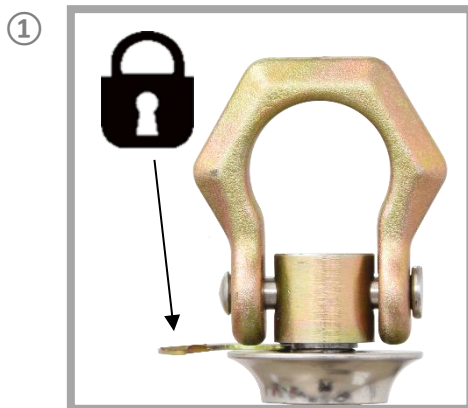

FA 60 038 00, FA 60 038 01

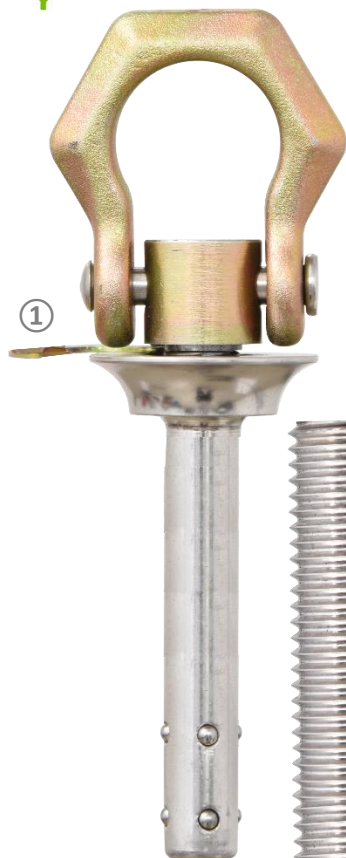


110 mm







FA 60 038 00

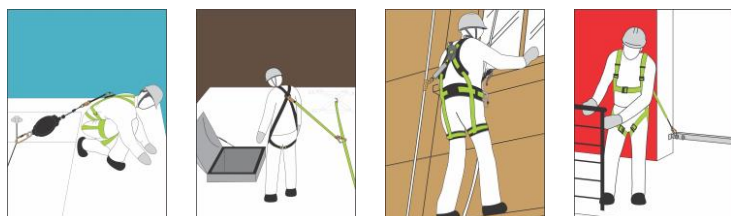

FA 60 038 01



HS CODE
83081000
CARTON SIZE / PCS.
FA 60 038 00 : 40 x 30 x 14 cm / 50
FA 60 038 01 : 40 x 30 x 14 cm / 30
Certificate of Test n° SPC0249910/1637 Issue 3
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom

REF.	FA 60 038 00	FA 60 038 01
	EN 795:2012 Type A	---
	x1	x1
MAT.		
DIM.	54 mm / 110 mm	110 mm
R (kN) / MBS (kN)	12 kN / 23 kN	12 kN / 23 kN
	CONCRETE Ø 20 mm x 150 mm	CONCRETE Ø 20 mm x 150 mm
	0.34 KG	0.49 KG




Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

CONCRETE

Béton
Concrete
Hormigón
Concreto
Beton

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength (kN) / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Matière de la structure d'accueil / Dimensions de la structure d'accueil
Material of the receiving structure / Dimensions of the receiving structure
Material de la estructura receptora / Dimensiones de la estructura receptora
Materiale della struttura ospitante / Dimensioni della struttura ospitante
Material der Aufnahmestruktur / Abmessungen der Aufnahmestruktur