



The G.Tripod 230 is an EN795 (class B) + TS16415 anchorage device that is durable and lightweight. It provides a secure and stable anchorage for confined space access. The three-pulley head allows equipment to be fitted to any of the legs.

It may be used as an anchor by more than one person simultaneously, providing the MWL is not exceeded.

Currently available in two sizes:
Compact (GSE230C) / Standard (GSE230S)



200kg
Personnel
MWL




250kg
Loads
MWL



2 Person

- Three pulley head
- Robust and lightweight
- Simple folding design
- Two person
- Safety factor 10:1 at 200kg

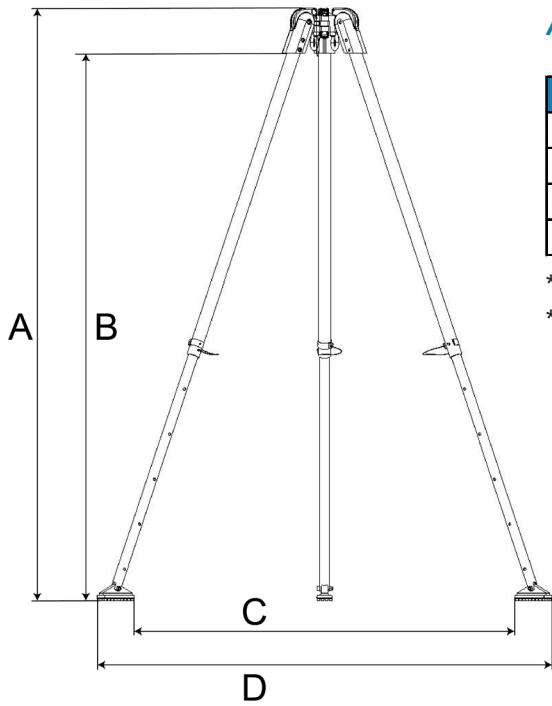


Assembled Dimensions

SIZE	A	B	C	D
COMPACT (GSE230C)*	1131	963	841	1112
COMPACT (GSE230C)**	1747	1579	1315	1585
STANDARD (GSE230S)*	1421	1253	1064	1334
STANDARD (GSE230S)**	2307	2172	1744	2015

* at lowest setting

** at tallest setting

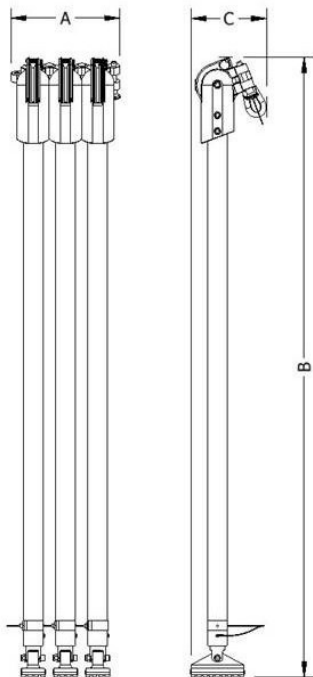

Folded Dimensions

SIZE	A	B	C
COMPACT (GSE230C)	270	1217	180
STANDARD (GSE230S)	270	1527	180

2006/42/EC

EN795

TS16415

